



greenlux
cost reduction LED lighting

Angel Series LED Downlight

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

- No UV or IR rays. No mercury
- Dimmable and Non-Dimmable option available
- Superb dimming effect
- SMD LED chips with high luminous flux
- PMMA diffuser to ensure even light output
- Compact, high efficiency line driver included
- Super slim design
- IP20 Rated, IP44 option
- 3 Years Warranty
- Applications include ceilings, walkways, restaurants, shops, hotels, museums & display cases



Specifications

Colour Range	3000-6000k
Lumen	95lm/W
Power Consumption	13W ~ 45W
Input Voltage	AC 100-240V
Beam angle	90°
Ra	>80
Power Factor	>0.9
Chipset	2835 SMD
Driver	Class II
IP Rating	IP20 or IP44 (option)
Dimmable	Triac 0-10V or Dali (option)
Dimming Range	10% ~ 100%

Dimensions & Materials

Product Dimensions (mm)	4"	Ø145*45
	5"	Ø170*45
	6"	Ø190*45
	8"	Ø230*45
	10"	Ø280*52
Cutout Dimensions (mm)	4"	Ø120-130
	5"	Ø140-150
	6"	Ø160-170
	8"	Ø200-210
	10"	Ø230-260
Housing Material	PMMA diffuser	
Housing Colour	White/Silver/Black	

Certification and Safety

Certifications	CE, RoHS, SAA, RCM
Environment	Indoor Location
Warranty	3 years





greenlux
cost reduction LED lighting


Angel Series LED Downlight

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours


Dimensions & Photometrics

(mm)


4" Downlight

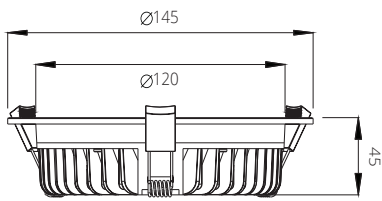


5" Downlight

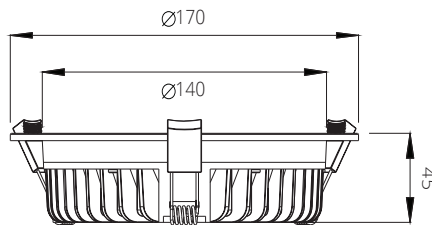


6" Downlight

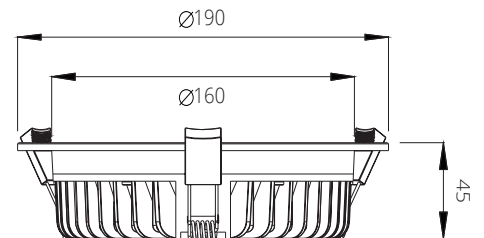

8" Downlight

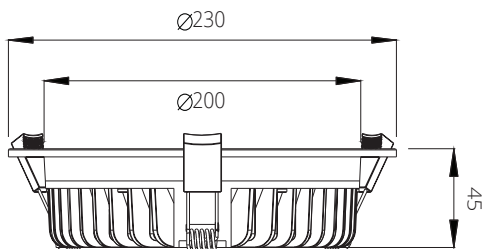


10" Downlight

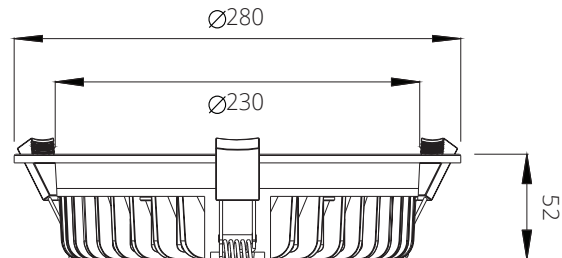


18W 4000k

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

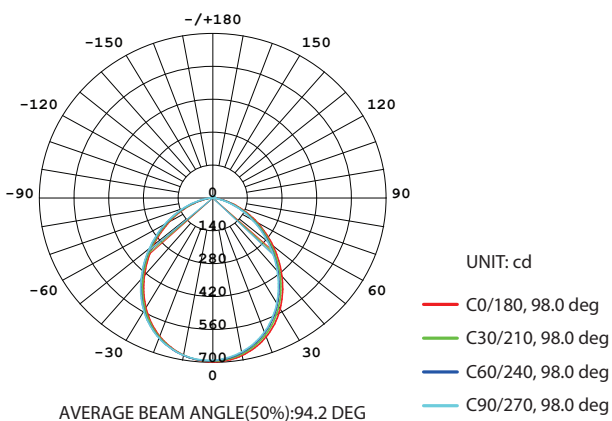

35W 4000K

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

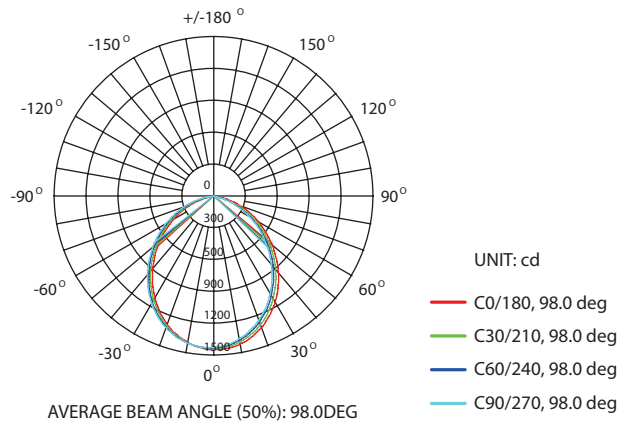



greenlux
cost reduction LED lighting

Angel Series LED Downlight

Available in Multiple Wattage
80% lumen maintenance at 50,000 hours

Model

Model#	CCT	LED Type	Lumen(lm)	Dimension (mm)	Cutout Size (mm)	Dimmable (option)	Voltage(V)
GUANG-13W 4"	3000K 4000K 5000K	2835 SMD	1235	145*45	120-130	Triac	AC100-240V
GUANG-18W 4"			1710	145*45	120-130	Triac	
GUANG-13W 5"			1235	170*45	140-150	Triac	
GUANG-18W 5"			1710	170*45	140-150	Triac	
GUANG-15W 6"			1425	190*45	160-170	Triac	
GUANG-18W 6"			1710	190*45	160-170	Triac	
GUANG-18W 8"			1710	230*45	200-210	Triac	
GUANG-25W 8"			2375	230*45	200-210	Triac	
GUANG-35W 10"			3325	280*52	230-260	Triac	
GUANG-45W 10"			4275	280*52	230-260	Triac	

