




**greenlux**  
cost reduction LED lighting

# Corona Series SMD LED Downlight

Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours

- Low UGR <19
- Deep Recessed, Transparent or frosted glass cover for option, with anti-glare diffuser
- Dimmable and Non-Dimmable option available
- Superb dimming effect
- Die-cast aluminum alloy housing provides excellent thermal dissipation
- White, Grey & Black housing colour options
- Applications include restaurants, offices, shops, schools, hotels & households. Also widely used for public areas such as stairways, lobby, receptions & corridors.

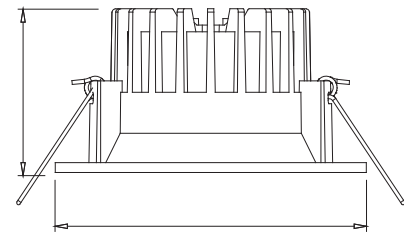

## Specifications

<b>Colour Range</b>	3000 ~ 6000k
<b>Power Consumption</b>	5W ~ 35W
<b>Lumen</b>	85lm/W
<b>Input Voltage</b>	AC 100-240V 50/60Hz
<b>Beam angle</b>	90°
<b>CRI</b>	>90
<b>Power Factor</b>	>0.9
<b>Chipset</b>	SMD
<b>Driver</b>	Class II
<b>IP Rating</b>	IP20
<b>Dimmable</b>	Triac, 0-10V & Dali (option)

## Dimensions & Materials

			<b>Cutout</b>
<b>Product Dimensions (mm)</b>	5W	Ø100*50	Ø80
	10W	Ø115*60	Ø95
	15W	Ø145*70	Ø120
	20W	Ø170*80	Ø150
	25W	Ø190*90	Ø170
	35W	Ø230*100	Ø200





**greenlux**  
cost reduction LED lighting

# Corona Series **SMD** LED Downlight

Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours

Model

Model#	CCT	LED Type	Lumen(lm)	Dimension (mm)	Cutout Size (mm)	Dimmable (option)	Voltage(V)
GSCOR-5W	3000K 4000K 5000K 6000K	SMD	435	Ø100*50	80	Triac 0-10V Dali	AC100-240V
GSCOR-10W			870	Ø115*60	95		
GSCOR-15W			1300	Ø145*70	120		
GSCOR-20W			1700	Ø170*80	150		
GSCOR-25W			2100	Ø190*90	170		
GSCOR-35W			3000	Ø230*100	200		

Light CCT Guide

