

Crystal Series Recessed LED Downlight




G



F

- UGR<19, unique design and smart function
- Gimbal & Fixed Angle available
- High efficiency COB chipset
- High luminous flux 100lm/W
- CRI 80 & CRI 90
- 36° & 60° Beam Angle
- High quality Die-casting Aluminum Alloy Housing with Clear Diffuser
- Triac / 0-10V / Dali Dimmer System options
- IP65 Rated
- 3 Years Warranty
- Applications include offices, shops, restaurants, hotels, schools & households

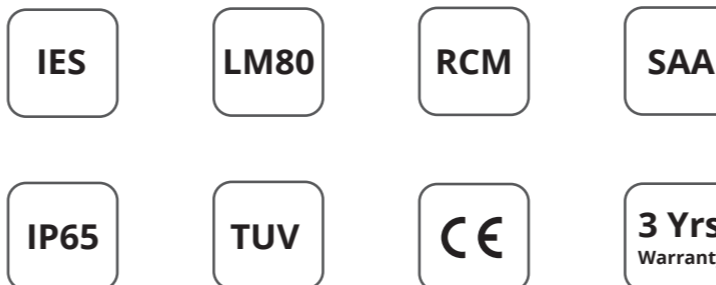

Specifications

Colour Range	2700k ~ 5000k
Power Consumption	5W ~ 13W
Luminous Flux	530 ~ 1350lm
Input Voltage	200V ~ 240V AC
Power Factor	>0.9
Chipset	COB
CRI	80 & 90
Beam angle	36° / 60°
IP Rating	IP 65
Dimmable	Triac/0-10V/Dali (option)

Dimensions & Materials

	Product Dimensions (mm)	Cutout (mm)
G	Ø80 * 30	Ø68 ~ 75
	Ø90 * 39.3	Ø75 ~ 80
	Ø110 * 49.5	Ø90 ~ 95
F	Ø80 * 40	Ø68 ~ 75
	Ø90 * 49.4	Ø75 ~ 80
	Ø110 * 64.3	Ø90 ~ 95
Housing Material	Die-casting Aluminum Alloy + Clear Diffuser	
Housing Colour	White	

Gimbal



Fixed Angle



- IES
- LM80
- RCM
- SAA
- IP65
- TUV
- CE
- 3 Yrs
Warranty


- AC 200-240V
- PF ≥0.9
- CRI 80/90
- IP 65
- DIM
- 36°
- 60°
- 30°

► | CCT

2700K | 3000K | 4000K | 5000K

► | Size & Size & Cutout

(Inch)	(AxBmm)	(mm)
2.5(A)	ø80x30	ø68-75
2.5(B)	ø90x39.3	ø75-80
3	ø110x49.5	ø90-95

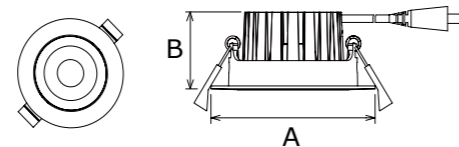

► | Size & Power & Lumen

2.5" (A)	5W	530lm
2.5" (A)	8W	815lm
2.5" (B)	10W	1000lm
3"	10W	1000lm
3"	13W	1350lm


- AC 200-240V
- PF ≥0.9
- CRI 80/90
- IP 65
- DIM
- 36°
- 60°

► | CCT

2700K | 3000K | 4000K | 5000K

► | Size & Size & Cutout

(Inch)	(AxBmm)	(mm)
2.5(A)	ø80x40	ø68-75
2.5(B)	ø90x49.4	ø75-80
3	ø110x64.3	ø90-95

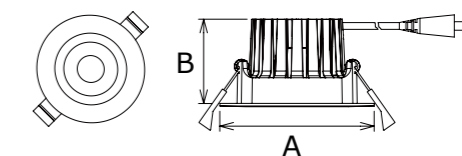

► | Size & Power & Lumen

2.5" (A)	5W	530lm
2.5" (A)	8W	805lm
2.5" (B)	10W	1000lm
3"	10W	1000lm
3"	13W	1350lm

Crystal Series Recessed LED Downlight

	Size (Inch)	Power	Lumen	Dimensions (mm)	Cutout (mm)
GUCRY-G	2.5" (A)	5W	530lm	ø80x30	ø68-75
	2.5" (A)	8W	815lm	ø80x30	ø68-75
	2.5" (B)	10W	1000lm	ø80x30	ø68-75
	3"	10W	1000lm	ø90x39.3	ø75-80
	3"	13W	1350lm	ø110x49.5	ø90-95
GUCRY-F	2.5" (A)	5W	530lm	ø80x40	ø68-75
	2.5" (A)	8W	805lm	ø80x40	ø68-75
	2.5" (B)	10W	1000lm	ø80x40	ø68-75
	3"	10W	1000lm	ø90x49.4	ø75-80
	3"	13W	1350lm	ø110x64.3	ø90-95

