




**greenlux**  
cost reduction LED lighting

# Jupiter Series Tilting Recessed LED Downlight

Available in Multiple Wattage  
80% Lumen Maintenance at 50,000hrs

- No UV or IR rays. No mercury
- Replaces traditional recessed lights
- High quality Sharp COB chipset
- High quality Class II SAA Eaglerise Driver
- High lumen output
- IP20 Rated
- 3 Years Warranty
- Applications are specific to cafes, restaurants, hotels, shopping centres, walkways, museums & display cases

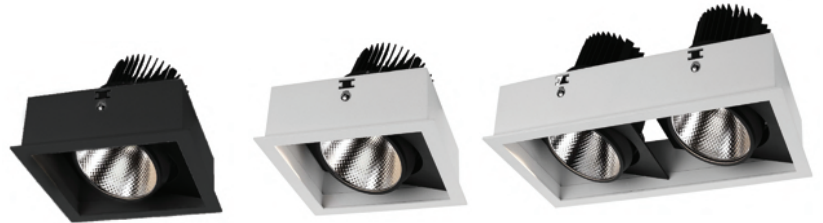

## Specifications

<b>Colour Range</b>	3000-6000k
<b>Power Consumption</b>	25W / 50W / 75W
<b>Luminous Flux</b>	2375lm ~ 7125lm
<b>Input Voltage</b>	100V/240V AC
<b>Operating Temp.</b>	-20°C to 40°C
<b>Beam angle</b>	38° ~ 55°
<b>Ra</b>	>90
<b>Chipset</b>	Sharp COB
<b>Current</b>	700mA
<b>LED Driver</b>	Class II SAA Eaglerise
<b>IP Rating</b>	IP20

## Dimensions & Materials

<b>Product Dimensions (mm)</b>	25W	171 * 171 * 121
	50W	318 * 171 * 121
	75W	465 * 171 * 121
<b>Cutout (mm)</b>	25W	159 * 159
	50W	306 * 159
	75W	454 * 159
<b>Housing Material</b>	Die-coated Aluminum + Clear Diffuser	
<b>Housing Colour</b>	White/Black	

## Certification and Safety

<b>Certifications</b>	IP20, CE, RoHS, SAA, RCM
<b>Environment</b>	Indoor Location
<b>Warranty</b>	3 years





**greenlux**  
cost reduction LED lighting


# Jupiter Series Tilting Recessed LED Downlight

Available in Multiple Wattage  
80% lumen maintenance at 50,000 hours




## Dimensions


### Single

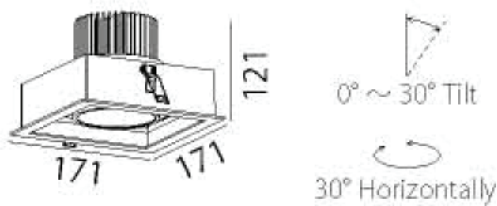


### Twin

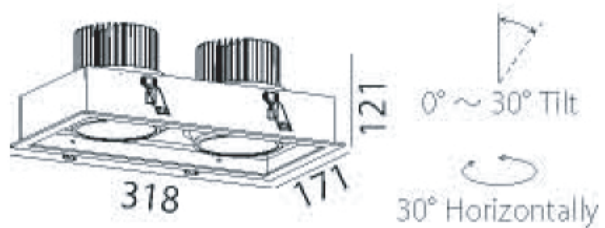

### Trio

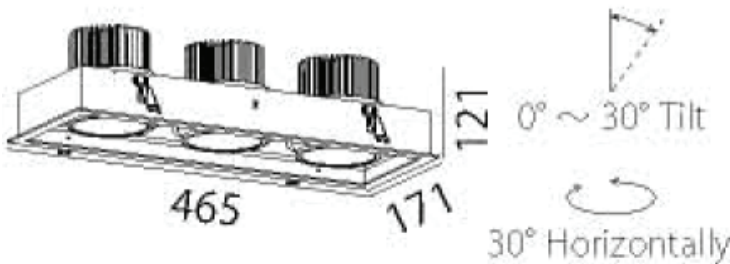

### Light CCT Guide

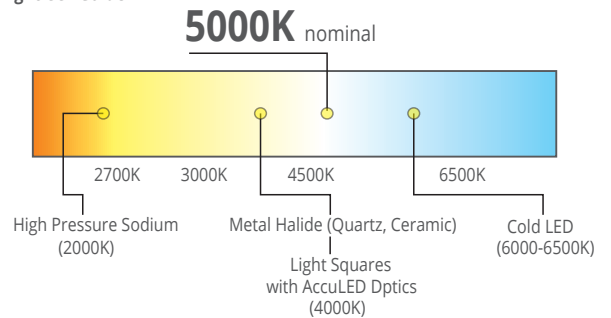

## Model

Model#	Dimensions (mm)	Cutout (mm)	Beam Angle	CCT	Lumens	Wattage	LED	Input Voltage
GJJUP-25W	171*171*121	159*159	38° & 55°	3000-6000k	2375	25W	Sharp COB	100-240V
GJJTW-50W	318*171*121	306*159	38° & 55°	3000-6000k	4750	2*25W	Sharp COB	100-240V
GJJTR-75W	465*171*121	454*159	38° & 55°	3000-6000k	7125	3*25W	Sharp COB	100-240V