



Chain GLS2126 LED Linear IP67


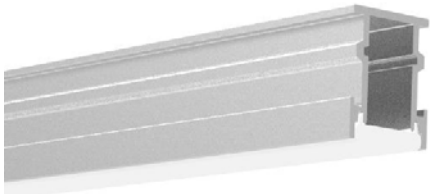


Features

- Applied to outdoor ground
- Can be used to outline and decorating
- AL6063-T5 aluminum profile with high-quality surface treatment.
- Close-fitting design without screw, Make installation more convenient.

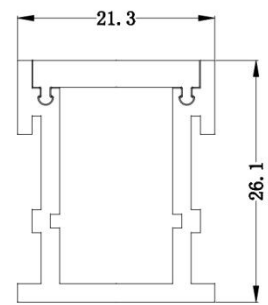

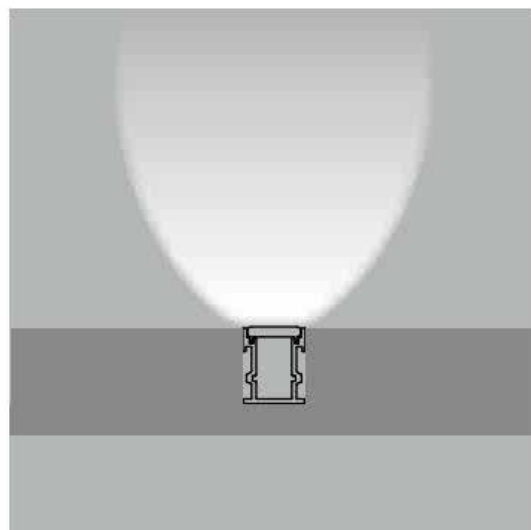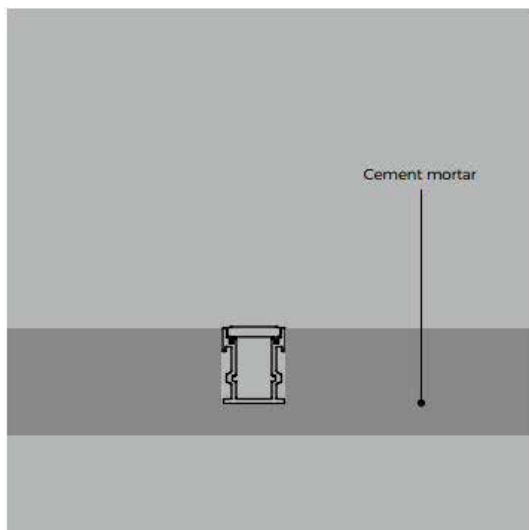

Unit: mm






Chain GLS2126 LED Linear IP67

Standard Configuration

Picture	Item	Parameter	Amount	Remarks
	Profile	Profile weight: 0.9kg/2.5m Size: L2500*W21.4*H25.8mm Material: GAL6063-T5 Surface processing: Anodizing	1pcs	
	cover	Type: Frosted diffuser Material: PC Light transmittance: 75% Size: L2500*W19*H5mm	1pcs	

Optional Accessories

Picture	Item	Parameter	Amount	Remarks
	Flexible strip GD8120-24V-8mm	Voltage: DC24V Power: 13.5W/M Width: 8mm Min cut: 50mm/6LEDs	5M/reel	
	End caps with hole	Size: L25.8*W21.4*H6mm Material: PC	2pcs/set	
	End caps	Size: L25.8*W21.4*H6mm Material: PC	2pcs/set	

Optical Parameter

(GD8120-24V-8mm light source, frosted diffuser)

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

