



# Steel 01 LED Bollard



## Bollard Light

LED Colour Temperature

Optics

3000K  
6000K


N/A

LED and Driver Module



## Outer Dimension

Unit:mm

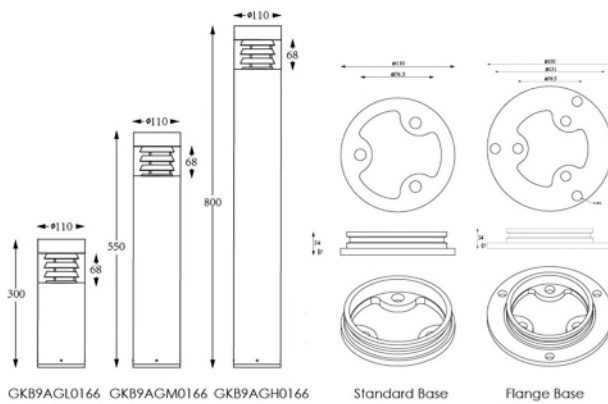

## Optional Base

1. Standard/Built-in Base  
SB00130

2. Flange Base  
FB00130




Flange base is an optional part which you need to remove the standard base before the assembling.

## Material Specifications

|                       |  |
|-----------------------|--|
| Housing               | T=60-80um Adhesion of ISO class 1/ASTM class 4B<br>12 <sup>#</sup> Die-casting powder coated aluminum.   |
| Light window          | PMMA   |
| LED                   | SMD3535 type LED   |
| LED Driver            | Constant Voltage Input, Constant Current Output  |
| Operating temperature | -20°C~40°C   |
| Power cable           | H05RN-F 3×1.0mm <sup>2</sup> L=0.3m (high voltage/short)<br>H05RN-F 3×1.0mm <sup>2</sup> L=0.5m (high voltage/medium)<br>H05RN-F 3×1.0mm <sup>2</sup> L=1.0m (high voltage/high) |
| Base                  | Standard Base<br>Flange base   |
| Dimmable Support      | Triac PWM 1-10V Dali   |

## Housing Color Option

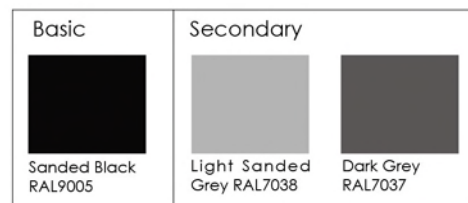

| Item                                      | Light source | Input voltage(V) | Typical operating current(mA) | Typical consumption(W)   | Typical luminance(lm) |
|---|--------------|------------------|-------------------------------|--------------------------|-----------------------|
| GKB9AGL0166<br>GKB9AGM0166<br>GKB9AGH0166 | SMD3535 X 6W | 120/240          | 120V = 108<br>240V = 60       | 120V = 7.7<br>240V = 8.1 | Warm white            |

