



Chain GAS35 D800

LED Curve & Round Linear Downward Light



Features

- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Various installation ways: pendant, recessed and surface mounted

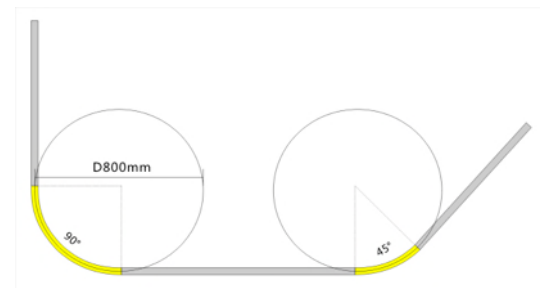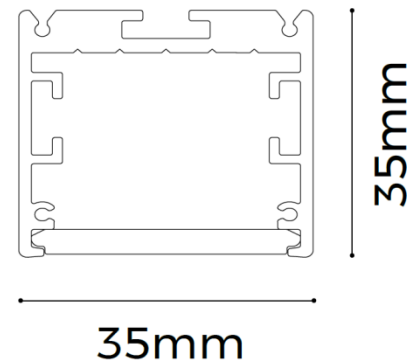

Details



Optional Accessories

① Profile:

Installation :Pendant/Recessed/Surface mounted


Material : AL6063-T5






Applications: Indoors



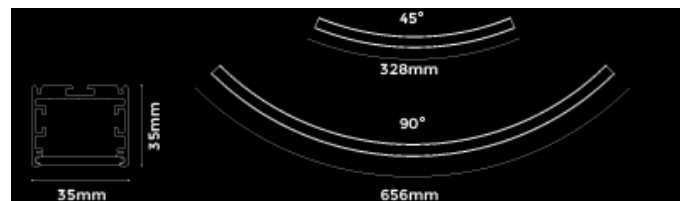





Profile weight : 0.26kg/ D800mm, 45°

Size : 328x35x35mm, 45° x 8, D800mm
656x35x35mm, 90° x 4, D800mm

Surface processing: Spray



| | | | |
|---|--|----------------|------------------------------------|
|  | ② Diffuser | L20000mm | Diffuser |
|  | ③ End cap | 35*35*1.5mm | AL6061 |
|  | ④ Rigid modular GCDY8140-24V-20mm-08A45 | DC24V 5.8W/pcs | width 20mm Min. cutting unit 100mm |
|  | Screw set | M3.5*40mm | Carbon steel |
|  | Power supply | ESD-V24-100S | 390*38*28.5mm |

| | | | |
|---|------------------------------------|------------------------------|-----------------------------------|
|  | Pendant cable with junction box | Steel cable D1.5*2000/4000mm | Junction box L80*W80*H30mm |
|  | Pendant cable without junction box | Steel cable D1.5*2000/4000mm | |
|  | straight fixed plate | L55*W10*H2mm | SPCC |
|  | AS35-LN fixed plate | L55*W10*H2mm | SPCC Straight&arc interconnection |
|  | AS35-N fixed plate | L55*W10*H2mm | SPCC Inner arc interconnection |
|  | AS35-X fixed plate | L55*W10*H2mm | SPCC |
|  | Headless inner hexagon screw | M5*4mm | |
|  | Flat-head inner hexagon screw | CM5*4mm | |

Optical Parameter

Rigid LED Strip Modular & Frosted Diffuser

