

Crest Series

LED Surface Mounted Down Light

*Architectural
Lighting*

- Architectural Design
- SDCM <2/<3/<5
- Anti-glare, High CRI 90 & 95 options
- IP54/IP65 options
- LM80: 60000 hrs
- Triac, Dali options for size Ø120*160
- High quality Citizen COB Chipset
- High light output
- High quality Aluminum housing
- Interchangeable CCT 3000K+4000K+5000K options
- Applications include shopping centres, offices, walkways, hotels, restaurants, galleries, display cases & household

Specifications

Colour Range	2700K / 3000K / 4000K / 5000K	
Lumen Efficiency (lm)	130lm/w	
Power Consumption	10W / 15W / 20W / 25W / 35W	
Input Voltage	200V/240V AC	
Dimensions (mm)	10W	Ø 90*100
	15W	Ø 90*100
	20W/25W	Ø 120*110
	35W	Ø 160*120
CRI	>90 / 95	
Power Factor	>0.95	
Chipset	Citizen COB	
Driver	Built-in Class II	
Dimmable	Triac / Dali (options)	
Housing Material	Aluminum Alloy + Clear Diffuser	
Housing Colour	White / Grey / Black	



Greenlux

5/216 Blackshaws Rd,
Altona North VIC 3025 Australia

Phone: 1300 650 625
Email: enquiries@greenlux.com.au

Facebook: [greenluxlighting](https://www.facebook.com/greenluxlighting)
Twitter: [GreenluxLED](https://twitter.com/GreenluxLED)

IES

LM80
-B10

RCM

SAA

TUV

CE




5 Yrs
Warranty

MacAdams
Rating 2/3

Crest Series

LED Surface Mounted Down Light

Dimensions & Photometrics

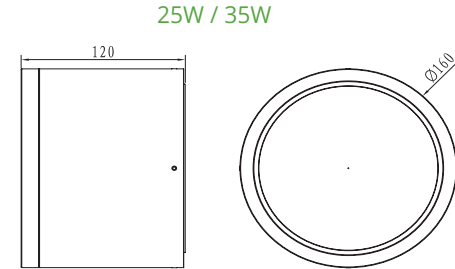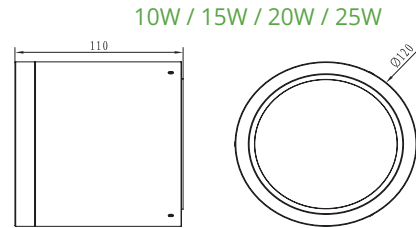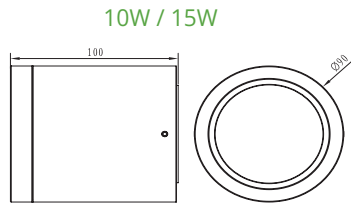

Model#	Dimensions (mm)	IP Rating	Beam Angle	CCT	Lumens	Wattage	LED	Dimmer (option)
GUCRE-10W	Ø90*100		60°		1300	10W		Triac
GUCRE-15W	Ø90*100		60°		1950	15W		Triac
GUCRE-20W	Ø120*110		24°/45°/60°		2600	20W		Triac
GUCRE-25W	Ø120*110		24°/45°/60°		3250	25W		Triac
GUCRE-35W	Ø160*120		24°/36°/45°/60°		4550	35W		Triac
GUCRE-10W-DA	Ø120*110	IP54/IP65	24°/45°/60°	2700K/3000K/4000K/5000K	1300	10W	COB	Dali
GUCRE-15W-DA	Ø120*110		24°/45°/60°		1950	15W		Dali
GUCRE-25W-DA	Ø120*110		24°/45°/60°		2600	20W		Dali
GUCRE-25W-DA	Ø160*110		24°/36°/45°/60°		3250	25W		Dali
GUCRE-35W-DA	Ø160*120		24°/36°/45°/60°		4550	35W		Dali